

SP440 Technical Specification

VIDEO STANDARD

NTSC: 525 LINES, 60 FIELDS/SEC.
PAL: 625 LINES, 50 FIELDS/SEC

VIDEO INPUT

COMPOSITE: 1.0V P-P, 75 OHMS

VIDEO OUTPUTS

COMPOSITE: 1.0V P-P, 75 OHMS

VIDEO RESOLUTIONS

720 x 256 PIXELS

PLAYBACK RATE (PER OUTPUT)

15 IMAGES/SEC

VIDEO LOSS DETECTION

TEMPERATURE RANGE

32°F TO 104°F (0°C TO 40°C) OPERATING
-4°F TO 158°F (-20°C TO 70°C) NON-OPERATING


OPERATING VOLTAGE

5 V DC/4 A, 20 W MAX

DIMENSIONS

19.0" (W) x 10.0" (D) x 1.75" (H)

EIA 19" RACK MOUNTABLE

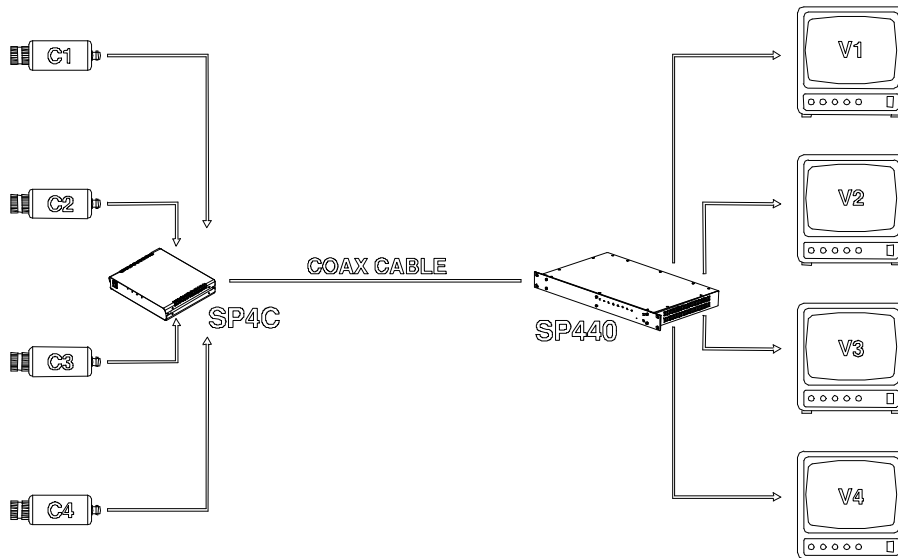

MADE IN U.S.A.